

EXHIBIT 152

SL-126 STROBE LIGHTS



ONLY 2-WIRE CONNECTION FOR 6-12 VOLTS

For "informative" general signaling requirement applications.

Powerful xenon tube makes flash visible from a distance

Improper polarity connection will not damage circuitry

Heavy-duty 18-gauge leads

Operating lifetime of over 300 hours

Temperature range from 22°F (-30°C) to 140°F (60°C)

Lens is made of high-impact and heat-resistant acrylex. Available in clear, amber, red, or blue (Also available separately.)

Case is made of high-impact resistant abs plastic, with an approx. diameter of 4" (10cm)

Four strobe lights available:

SL-126A — Amber lens

SL-126B — Blue lens

SL-126C — Clear lens

SL-126R — Red lens

* CE approved products are identified with the CE mark on the product. Contact SECO-LARM for further details.

EXHIBIT 19
WIT: VALANDRA
DATE: 9/27/18
REPORTER: J. HARMONSON

VGT0056100

SL-126 Strobe Lights Installation Manual

SPECIFICATIONS

Circuits

All solid-state

Input Connections

Red: Positive Black: Negative

Leads

18-gauge UL Listed, 12" long

Electrical Protection

Reverse polarity protected

Illumination

100,000 candle power

Input Voltage

6 to 12VDC

Input Current

120mA \pm 20% at 6VDC

200mA \pm 20% at 12VDC

Flash Rate

Over 60/minute at 6VDC

Over 90/minute at 12VDC

Operating Life

Over 2,000,000 flashes

Operating Life (Hours)

450 at 6VDC 300 at 12VDC

Environment


-22°F (-30°C) to 140°F (60°C)

Base


High-impact black ABS

Lens

High-impact and heat resistant acryrex. Available in clear, amber, red, and blue.

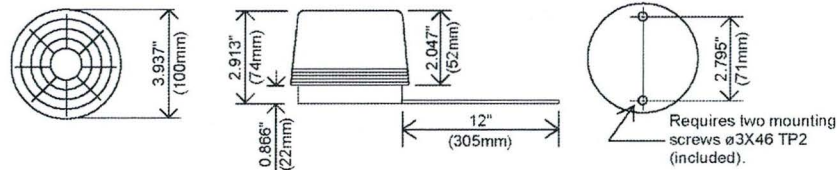

Mounting Template

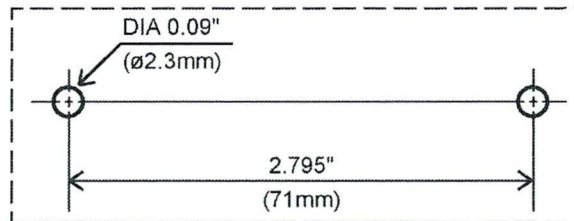

NOTICE

The information and specifications printed in this manual are current at the time of publication. However, the SECO-LARM policy is one of continual development and improvement. For this reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints or typographical errors.

Copyright © 2001 SECO-LARM U.S.A., Inc. All rights reserved. This material may not be reproduced or copied, in whole or in part, without the written permission of SECO-LARM.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA, 92606, U.S.A.

filename: MuSL126b.p65

SECO-LARM U.S.A., Inc.